6 3/4" Apertures *Lyte*ning® Incandescent Convertible IC/Non-IC Frame-In Kit

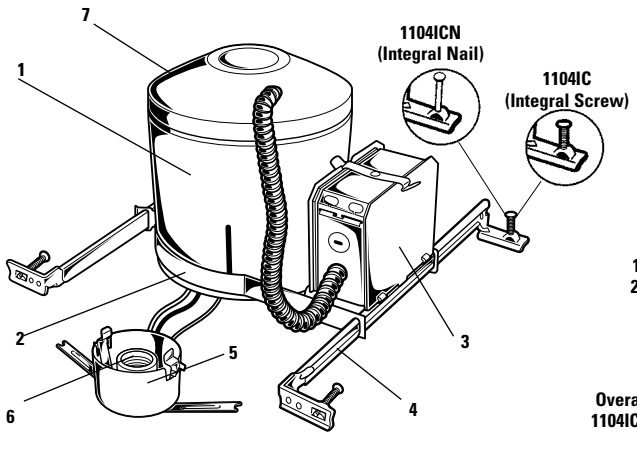

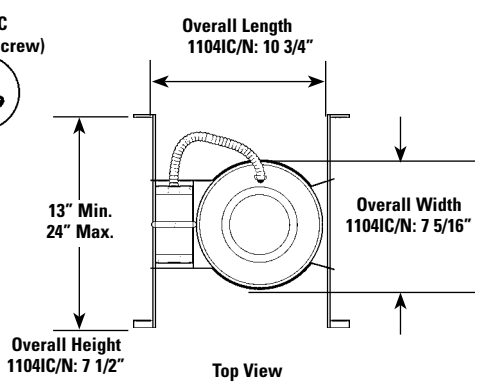


Frame-in Kit


Reflector Trim

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Frame-In Kit	Reflector Trims — See Individual Reflector Trim Specification Sheets								
	Open Downlight						Eyeball	Enclosed Diffusers	Wall Washer
	Reflector	Cone	Satin Cone	Cross Blade	Baffles	Basic White			
1104IC **1104ICQ**** **1104ICN** **1104ICNQ****	**1143** **1144** **1144CD**	**1112†** **1113†** **1113BK†** **1113CD†** **1113WH**	**1108†** **1110†**	**1132**	**1105** **1105WH** **1176** **1176WH** **1179M1** **1179WH**	**1170M1** **1171**	**1182**	**1121** **1124** **1126*** **1128*** **1134*** **1177SH*** **1178SH*** **1177LX** **1178LX** **1190**	**1185*** **1186*** **1186WH***
								Open Wet	
								1181WH **1181CD**	

†Add NM to catalog number for Natural Metal flange and finish.

* For Non-IC applications only.
**Supplied with integral push-In wire connectors

Features

1. **Housing:** .032 (#20 ga.) aluminum. UL listed convertible IC/NON-IC. 2" vertical adjustment in ceiling. Can be removed for access to junction box and ceiling plenum. AirSeal® housing minimizes air leakage to less than 2 CFM at 1.57 PSF (or 75pa), which complies with Model Energy Code (Section 602.3.3) and Washington State Energy Code (Section 502.4) and reduces heat loss and condensation in ceiling.
2. **Mounting Frame:** .048 (#18 ga.) galvanized steel. Locks into position along length of mounting bars with locking spring and bendable slot. (3) slots 90° apart simplify alignment.
3. **Junction Box:** 2"X 4" X 3 1/2" (22 cu. in.) .032 (#22 ga.) galvanized steel. UL listed for maximum of 8 (#12 ga.) through branch circuit conductors. Integral cable clamps permit attachment of non-metallic (#12 or #14 ga.) Romex® cable without tools or additional connectors.
4. **Mounting Bars:** .059 (#16 ga.) galvanized steel. Bars pivot for easy attachment and wire-in below ceiling line. Bars extend to accommodate 16" to 24" O.C. joist spacing. 1104IC features integral self-tapping phillips screws for secure attachment to wood or metal construction. The 1104ICN features integral nails for secure attachment to wood. Both attach to T-bar ceilings without the need of accessories.
5. **Socket Housing:** Impact extruded aluminum or galvanized steel. Attached trim retaining spring secures trim to any height on housing wall.
6. **Socket:** Porcelain medium base: nickel plated screw shell. Pre-wired with #18 ga. SF1 (300 VOLT 200° C) leads to junction box.
7. **Thermal Protector:** Meets NEC and UL requirements. Located inside housing.

Options & Accessories

AirSeal® Kit: **LAS56**

Options & Accessories (continued)

Note: Use only if factory installed tape or knockouts are removed from vertical adjustment slots in housing wall.

Labels

UL (Type IC/NON-IC Convertible; Suitable for Damp Locations);

Complies with Air Leakage Requirements stated in the Model Energy Code and the Washington State Energy Code.

AirSeal® is a registered trademark of Lightolier.
Romex® is a registered trademark of General Cable Industries Inc.
US and Foreign Patents Pending.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2007 Genlyte Group LLC •I0507

LIGHTOLIER®